





MICROSTRIP LINEAR POLARIZED ANTENNA FOR TELECOMMUNICATIONS


PA3.5-01
PA3.5-02



POWER HANDLING **20 W**
 CROSS-POLARIZATION **20 dB**
 FRONT-TO-BACK RATIO **25 dB**
 VSWR **1,6 max**
 CONNECTOR **N-TYPE (50 Ohm)**
 HIGH EXTERNAL INFLUENCE STEADINESS

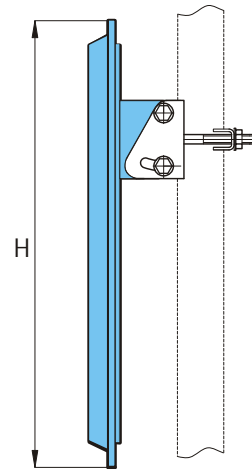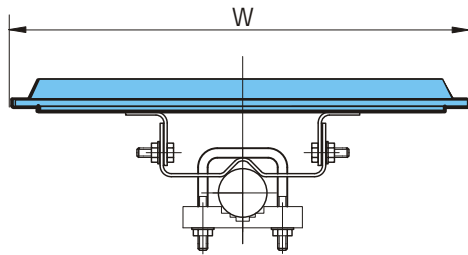


MODEL #	FREQUENCY RANGE, GHz	GAIN, dB	BEAMWIDTH	DIMENSIONS, WxH, mm	WEIGHT, kg
PA3.5-01	3.4...3.7	21.0 ± 0.5	14° ± 1°	390×390	1.3
PA3.5-02	3.4...3.7	18.5 ± 0.5	18° ± 1°	290×290	0.9

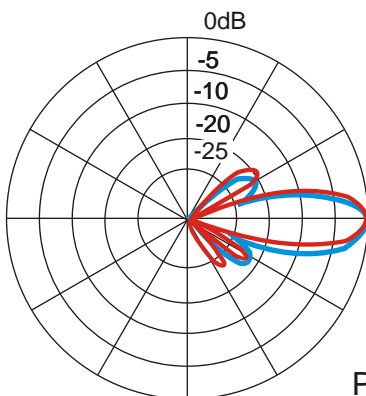

PA3.5-01

Radiation Pattern:

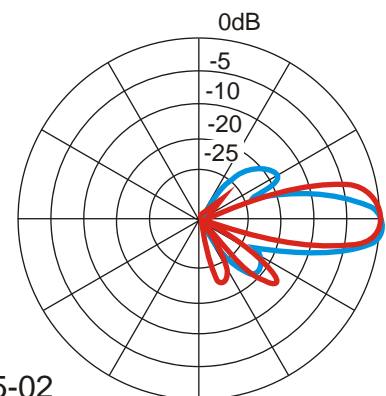

PA3.5-02

27 Prospect Engelsa
 194156 St. Petersburg, RUSSIA
 Phone/Fax: +7 (812) 293-8445
 E-mail: resonance@mail.fi.ru